



US00D810933S

(12) **United States Design Patent** (10) Patent No.: **US D810,933 S**
Chrisman (45) Date of Patent: ** Feb. 20, 2018

(54) **COMPRESSION TORQUE DEVICE**

(71) Applicant: **Vascugenix LLC**, Little Rock, AR (US)

(72) Inventor: **Freddy Dwight Chrisman**, Little Rock, AR (US)

(73) Assignee: **Vascugenix LLC**, Little Rock, AR (US)

(**) Term: **15 Years**

(21) Appl. No.: **29/584,792**

(22) Filed: **Nov. 17, 2016**

(51) LOC (11) Cl. **24-02**

(52) U.S. Cl.

USPC **D24/133**

(58) **Field of Classification Search**

USPC D24/112, 133, 140, 143

CPC A61M 25/0113; A61M 25/09041; A61M 25/09116

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,312,128 A * 4/1967 Wasson E04G 21/122
140/123.5

D329,698 S * 9/1992 Loney D24/133

5,161,534 A * 11/1992 Berthiaume A61M 25/01
226/127

6,030,349 A * 2/2000 Wilson A61M 25/09041
600/434

7,972,282 B2 * 7/2011 Clark A61M 25/0113
600/585

(Continued)

Primary Examiner — Philip S Hyder

(74) Attorney, Agent, or Firm — Evan Law Group LLC

(57) **CLAIM**

The ornamental design for a compression torque device, as shown and described.

DESCRIPTION

FIG. 1 is a front, top, and left side perspective view of a compression torque device with a moveable actuator, showing my design;

FIG. 2 is a left side elevational view thereof;

FIG. 3 is a right side elevational view thereof;

FIG. 4 is a top plan view thereof;

FIG. 5 is a bottom plan view thereof;

FIG. 6 is a front elevational view thereof;

FIG. 7 is a back elevational view thereof; and

FIG. 8 is a front, top, and left side perspective view thereof, showing the actuator in an alternative position.

FIG. 9 is a front, top, and left side perspective view of a compression torque device with a moveable actuator and an introducer tip, showing my design;

FIG. 10 is a left side elevational view thereof;

FIG. 11 is a right side elevational view thereof;

FIG. 12 is a top plan view thereof;

FIG. 13 is a bottom plan view thereof;

FIG. 14 is a front elevational view thereof;

FIG. 15 is a back elevational view thereof; and

FIG. 16 is a front, top, and left side perspective view thereof, showing the actuator in an alternative position.

FIG. 17 is a front, top, and left side perspective view of a compression torque device with a moveable actuator, showing my design;

FIG. 18 is a left side elevational view thereof;

FIG. 19 is a right side elevational view thereof;

FIG. 20 is a top plan view thereof;

FIG. 21 is a bottom plan view thereof;


FIG. 22 is a front elevational view thereof;

FIG. 23 is a back elevational view thereof; and

FIG. 24 is a front, top, and left side perspective view thereof, showing the actuator in an alternative position.

The broken lines depict portions of the compression torque device in which the design is embodied that are not considered part of the claimed design.

1 Claim, 21 Drawing Sheets

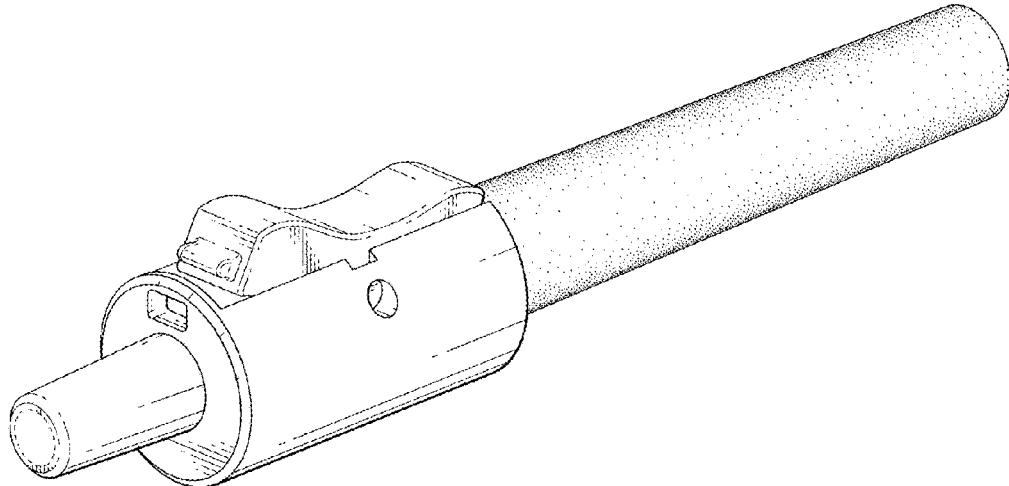

(56)

References Cited

U.S. PATENT DOCUMENTS

8,025,629	B2 *	9/2011	Shelton	A61M 25/0113
				600/585
8,147,481	B2 *	4/2012	Whittaker	A61M 25/0113
				600/585
9,295,815	B2 *	3/2016	Stevens	A61M 25/09041
9,615,951	B2 *	4/2017	Bennett	A61F 2/95
2007/0219467	A1 *	9/2007	Clark	A61M 25/0113
				600/585
2009/0124934	A1 *	5/2009	Rabbitte	A61M 25/09041
				600/585

* cited by examiner

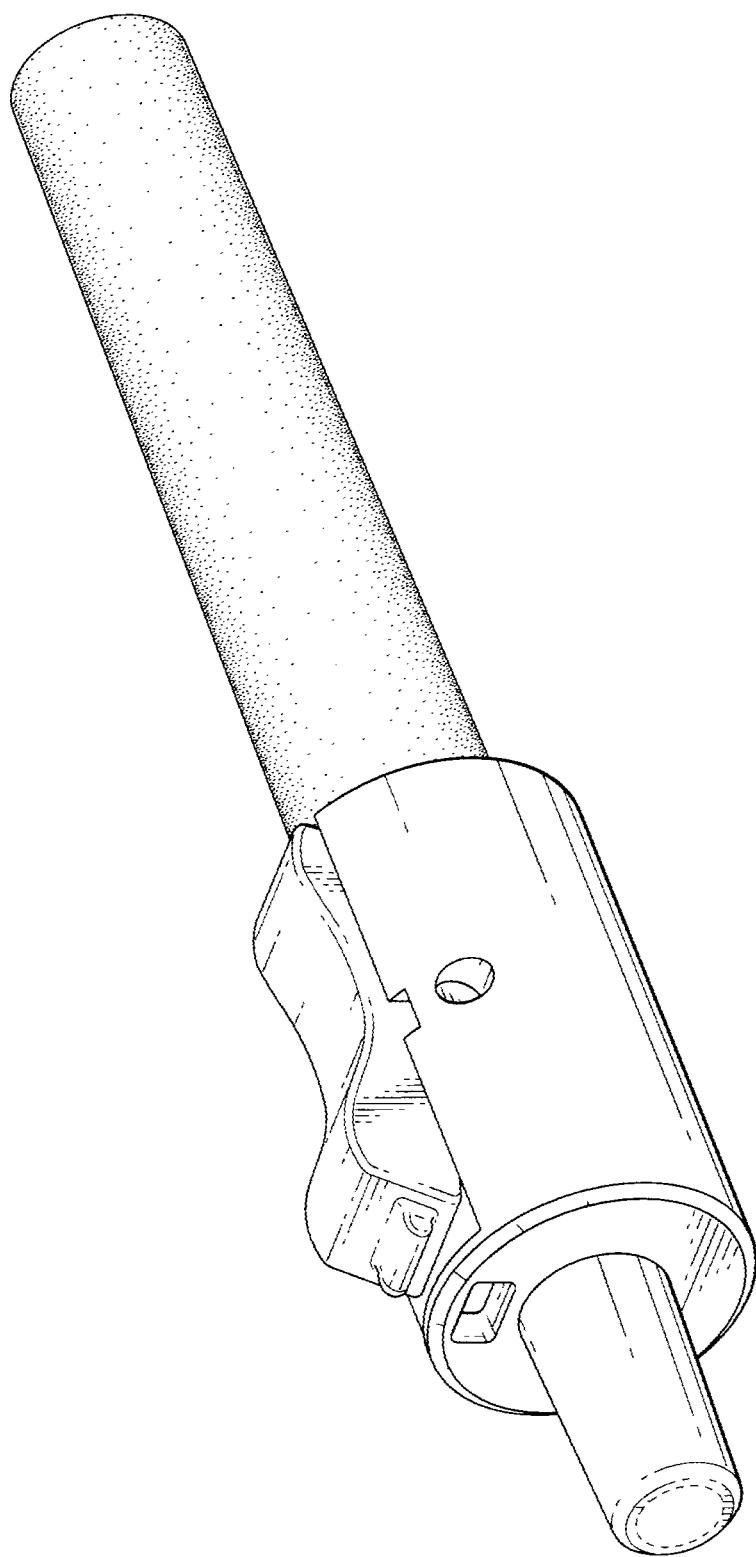


FIG. 1

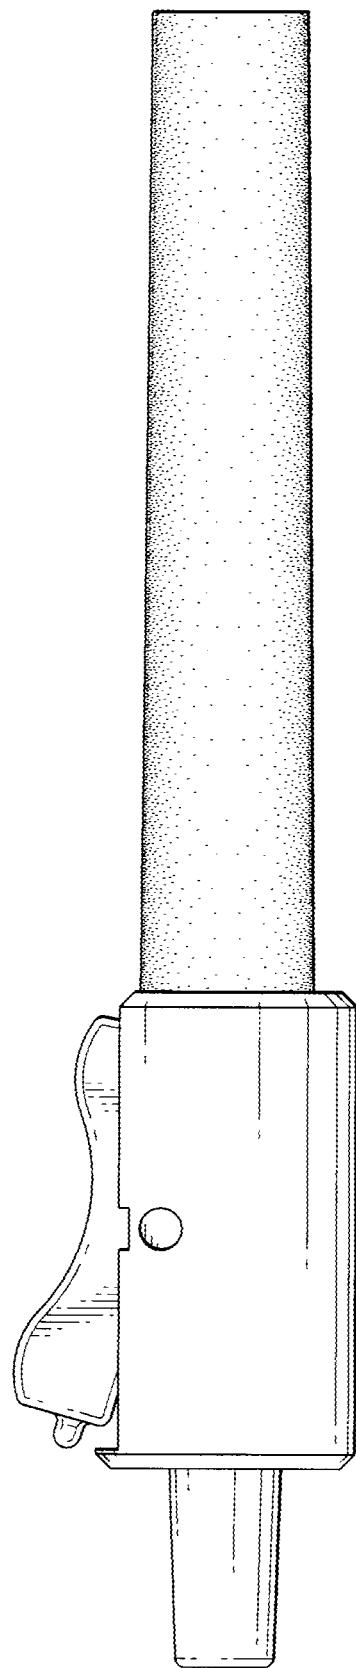


FIG. 2

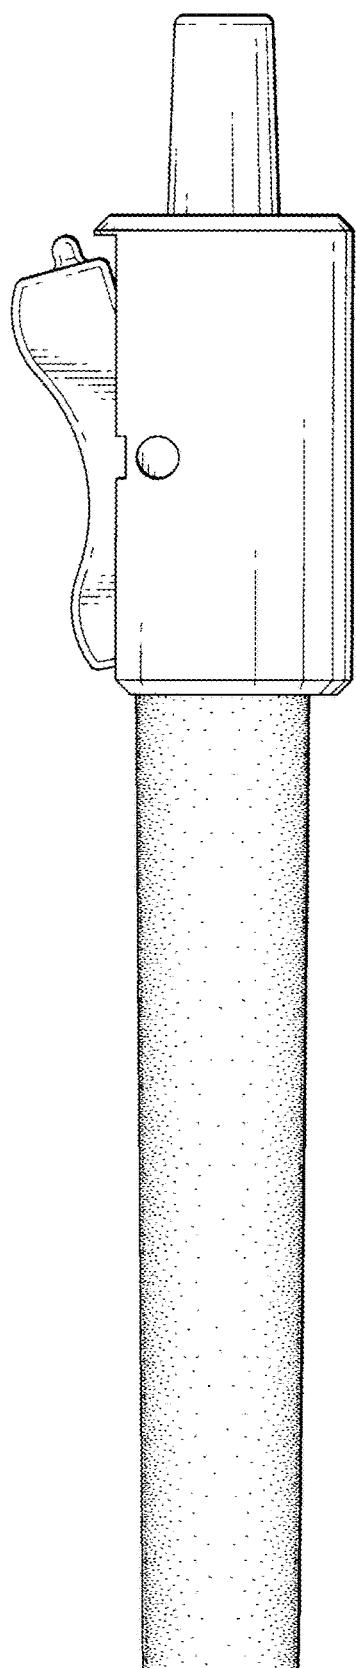


FIG. 3

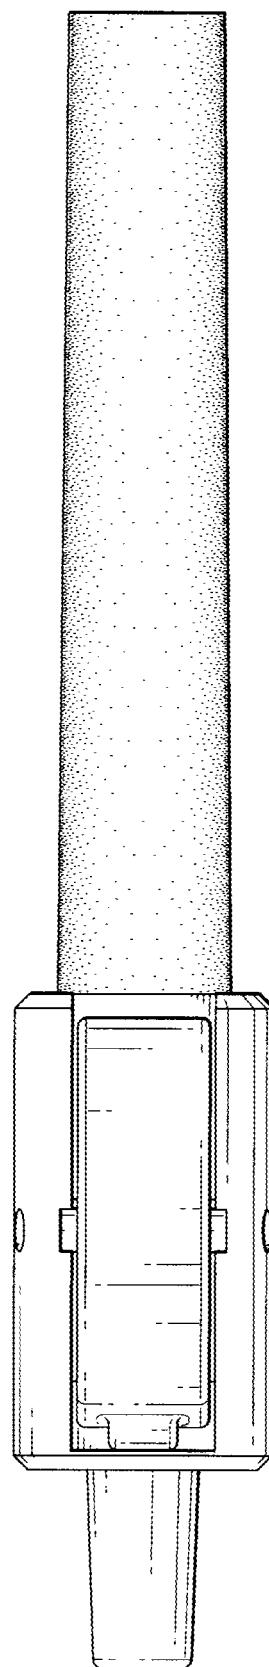


FIG. 4

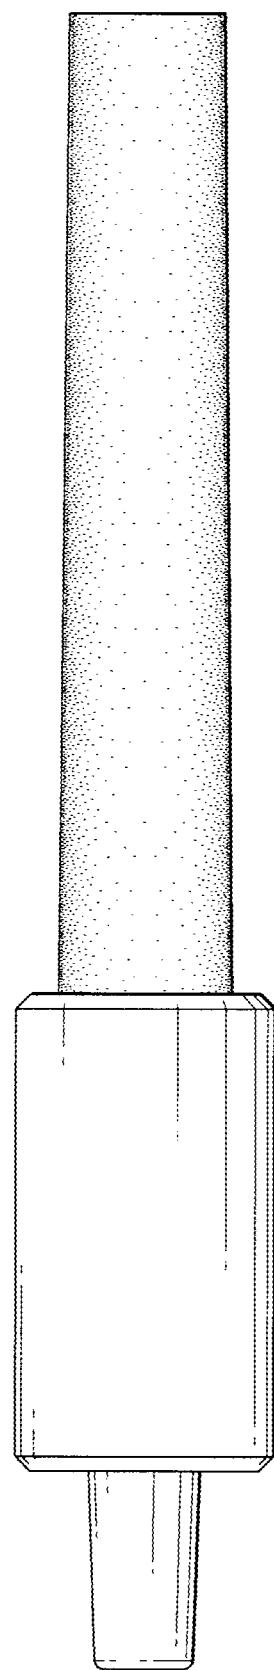


FIG. 5

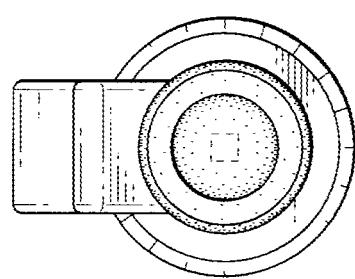


FIG. 7

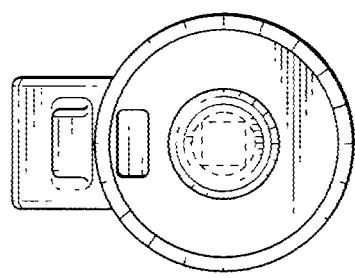


FIG. 6

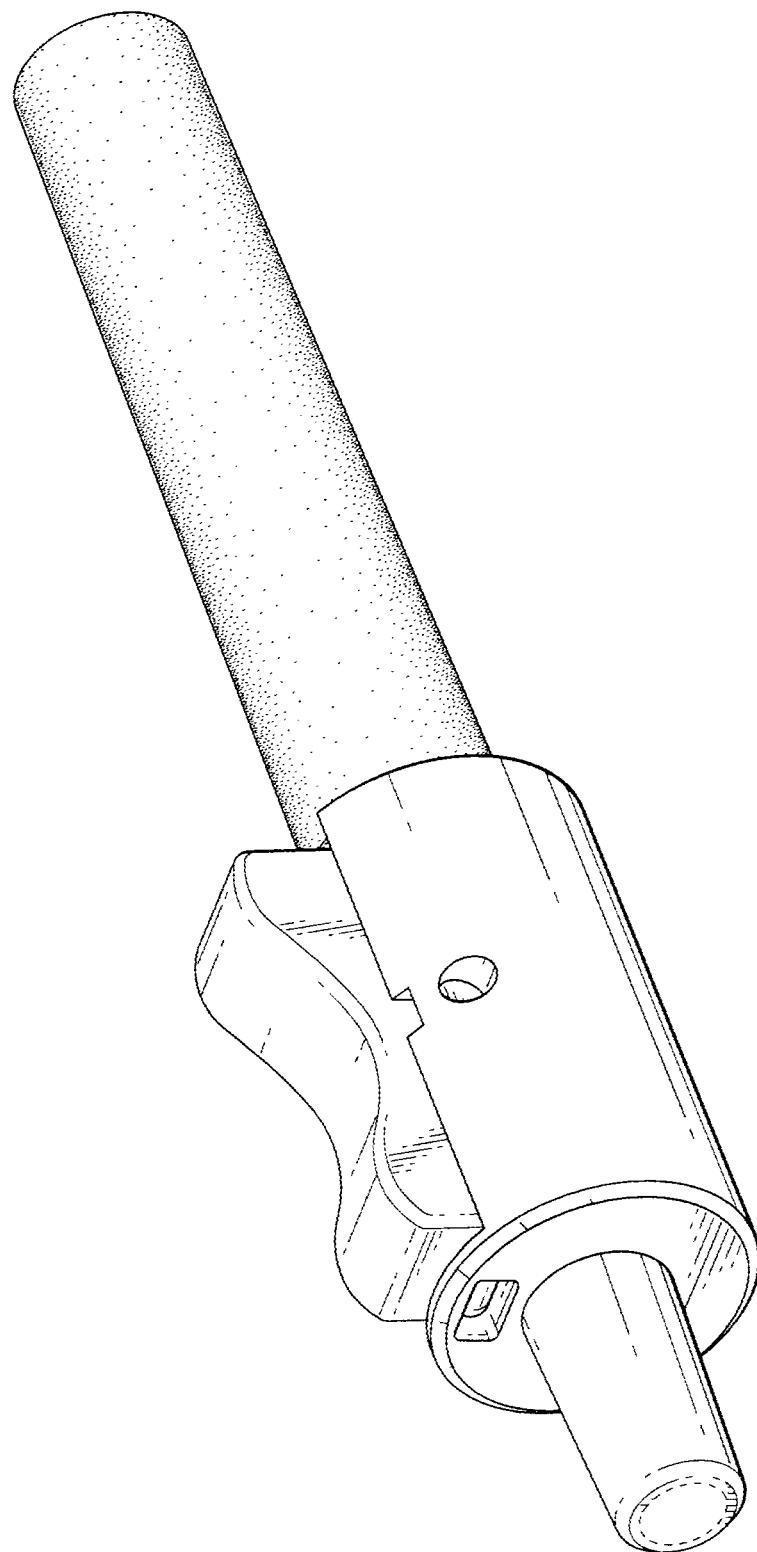


FIG. 8

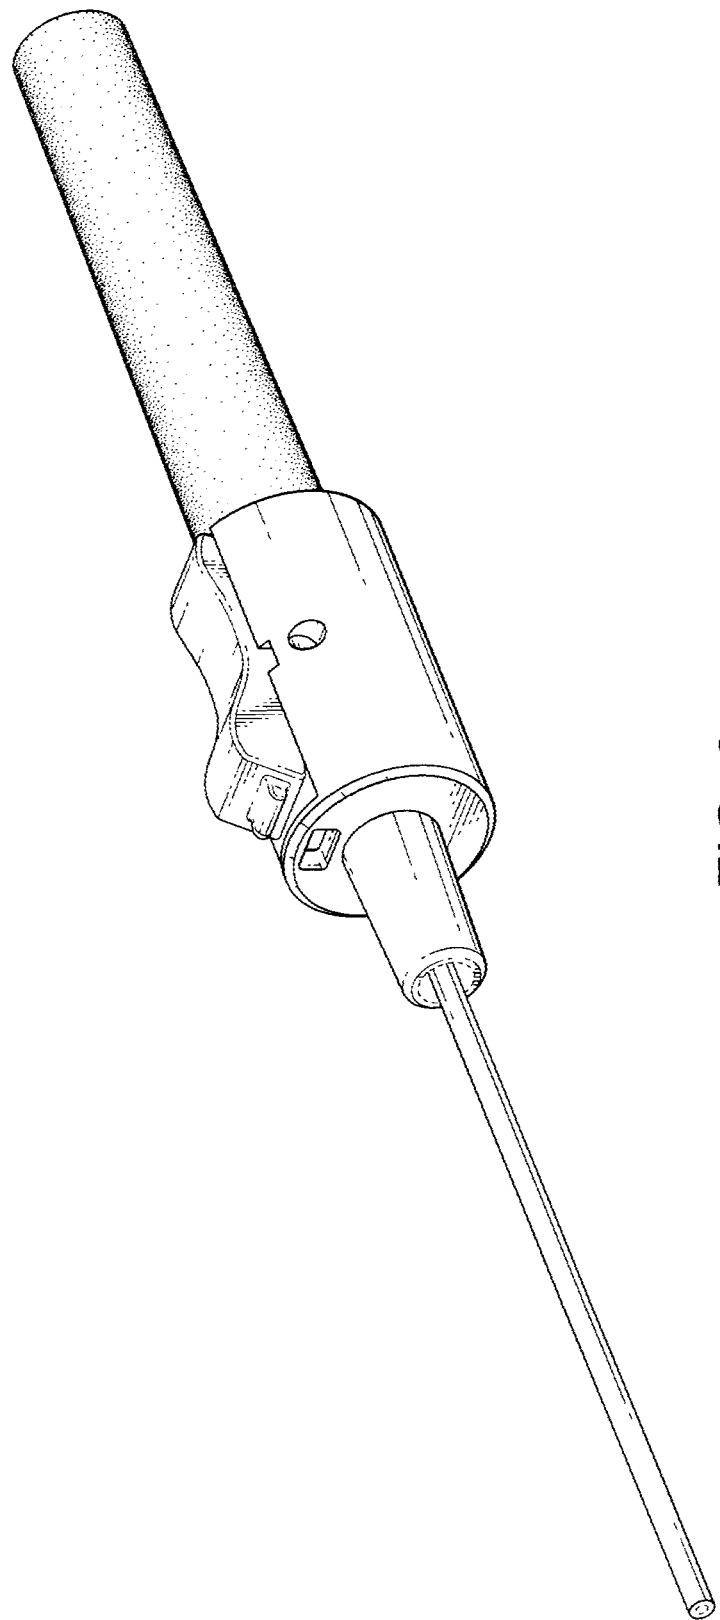


FIG. 9

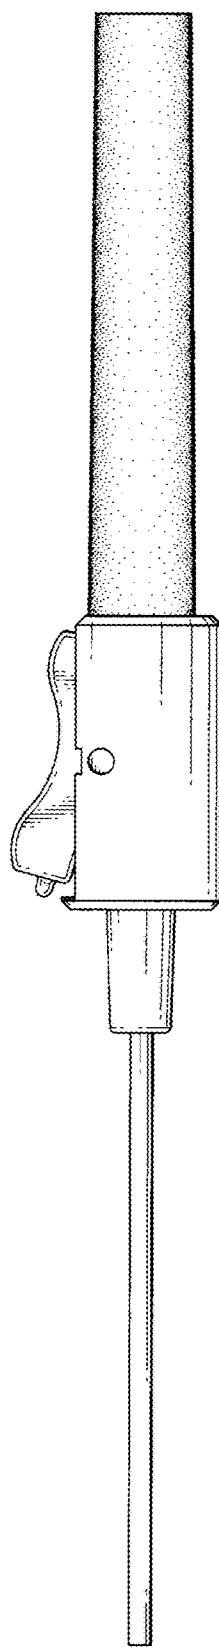


FIG. 10

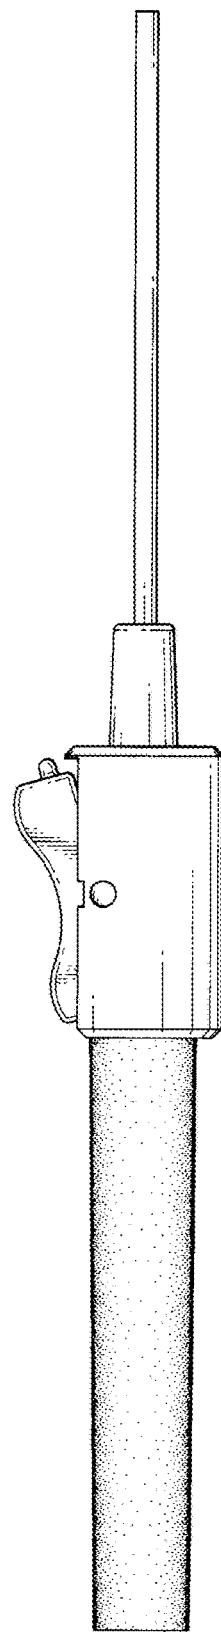


FIG. 11

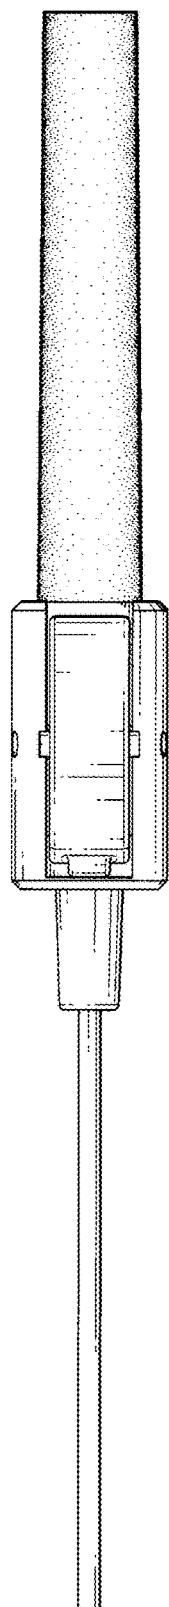


FIG. 12

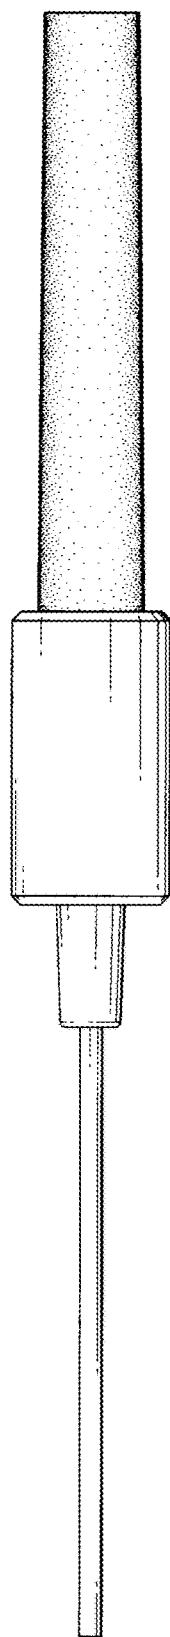


FIG. 13




FIG. 15




FIG. 14

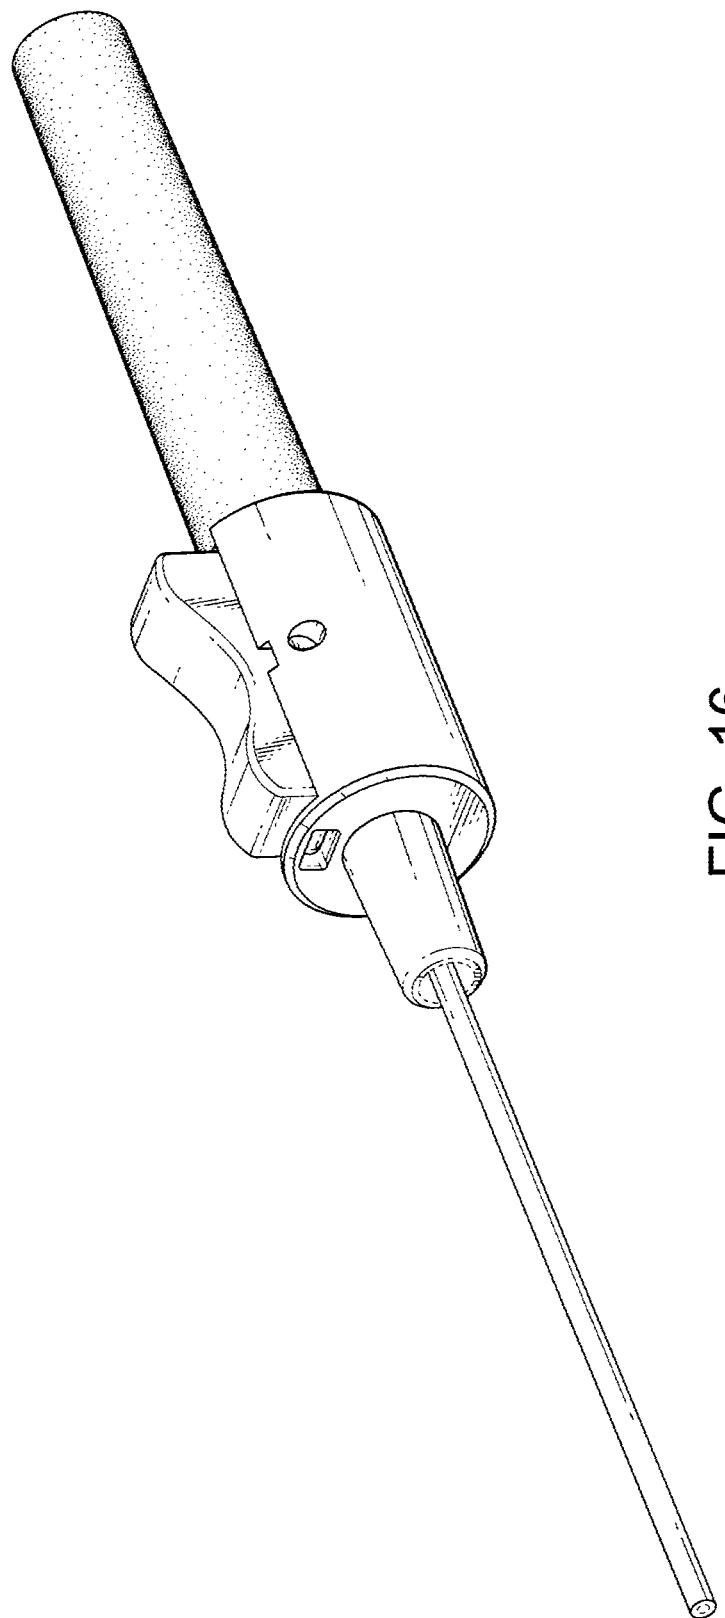


FIG. 16

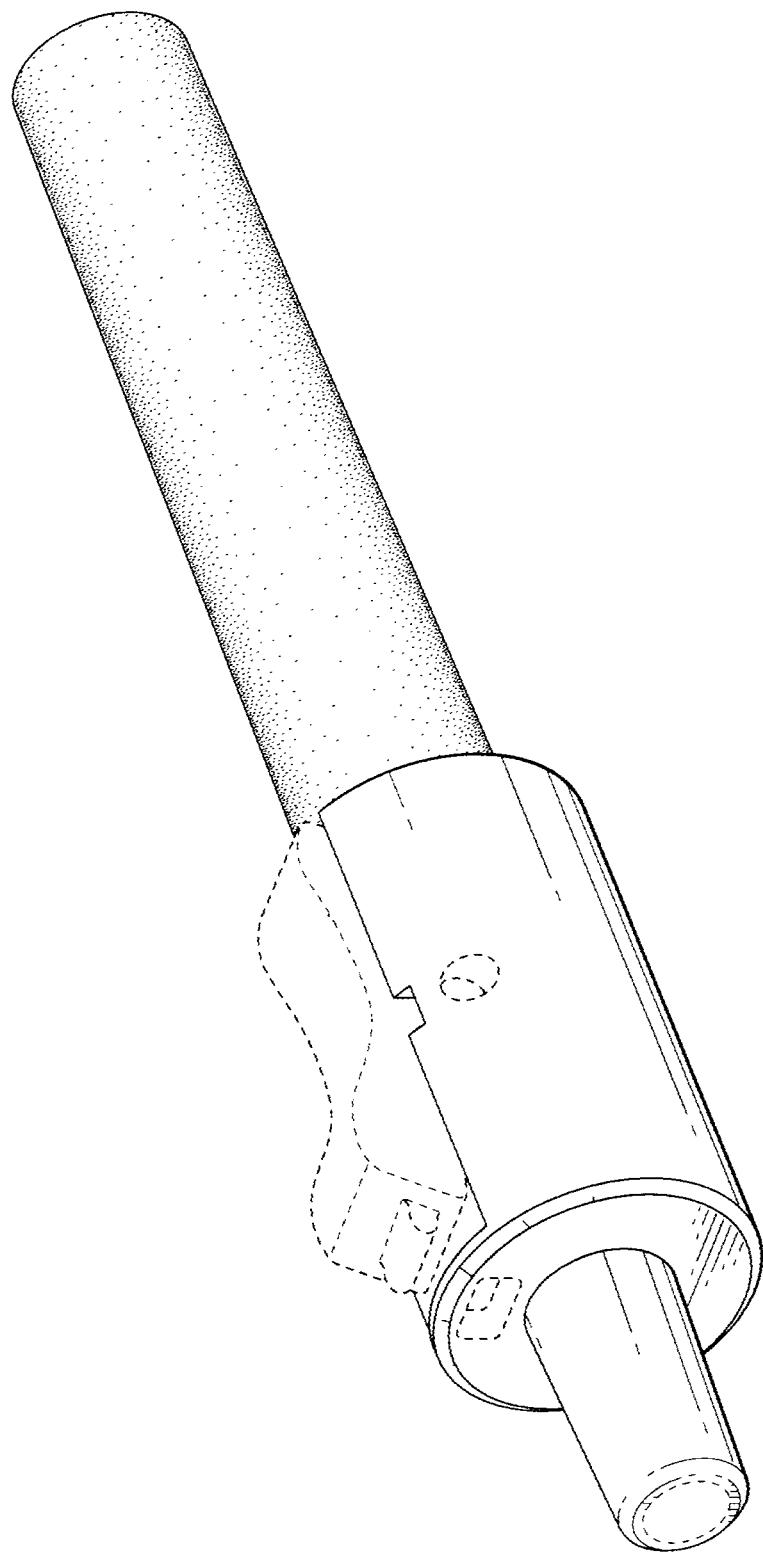


FIG. 17

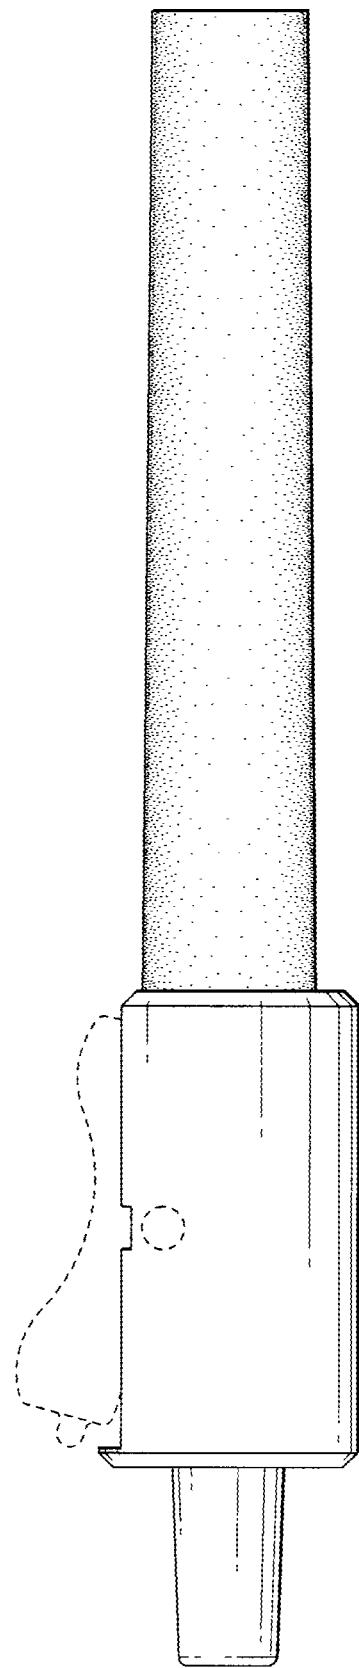


FIG. 18

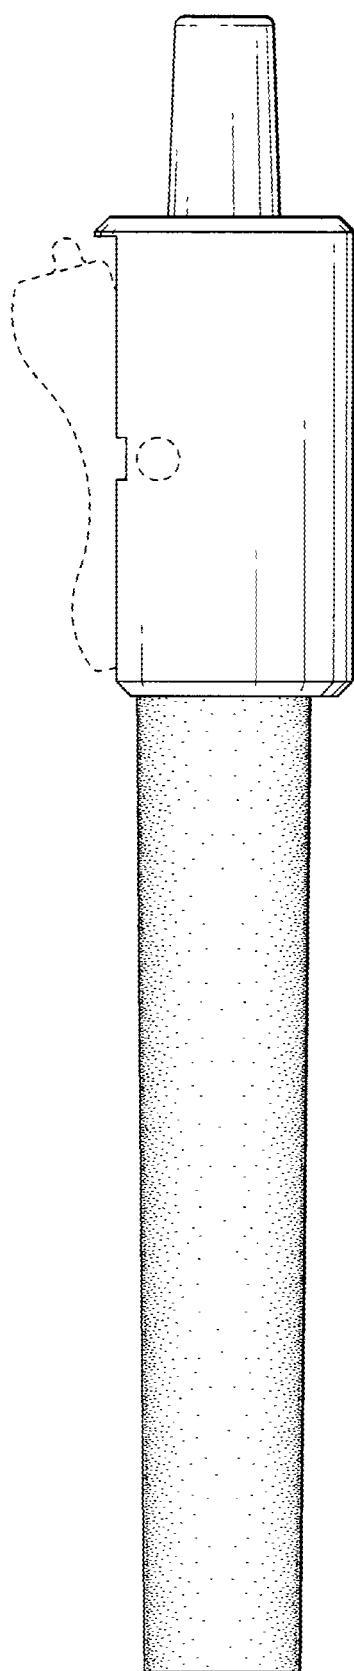


FIG. 19

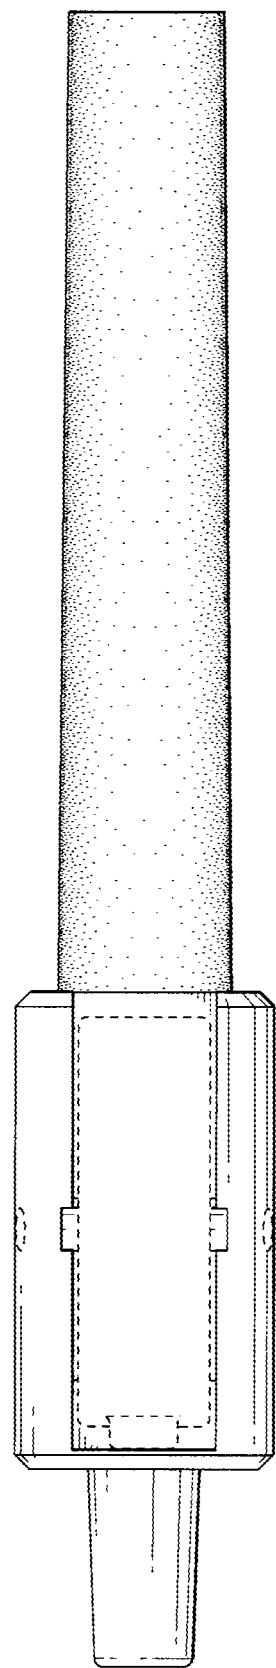


FIG. 20

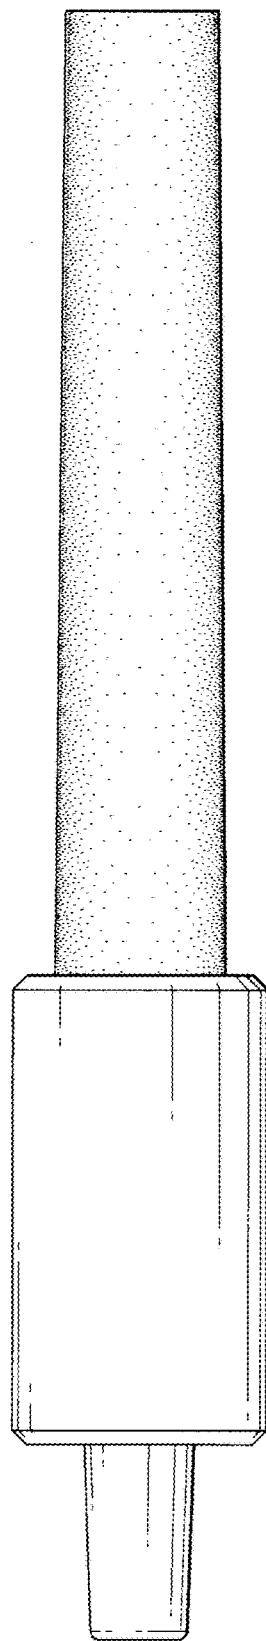


FIG. 21

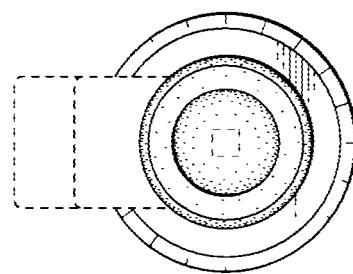


FIG. 23

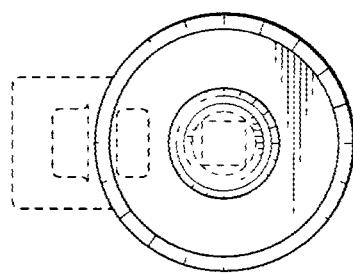


FIG. 22

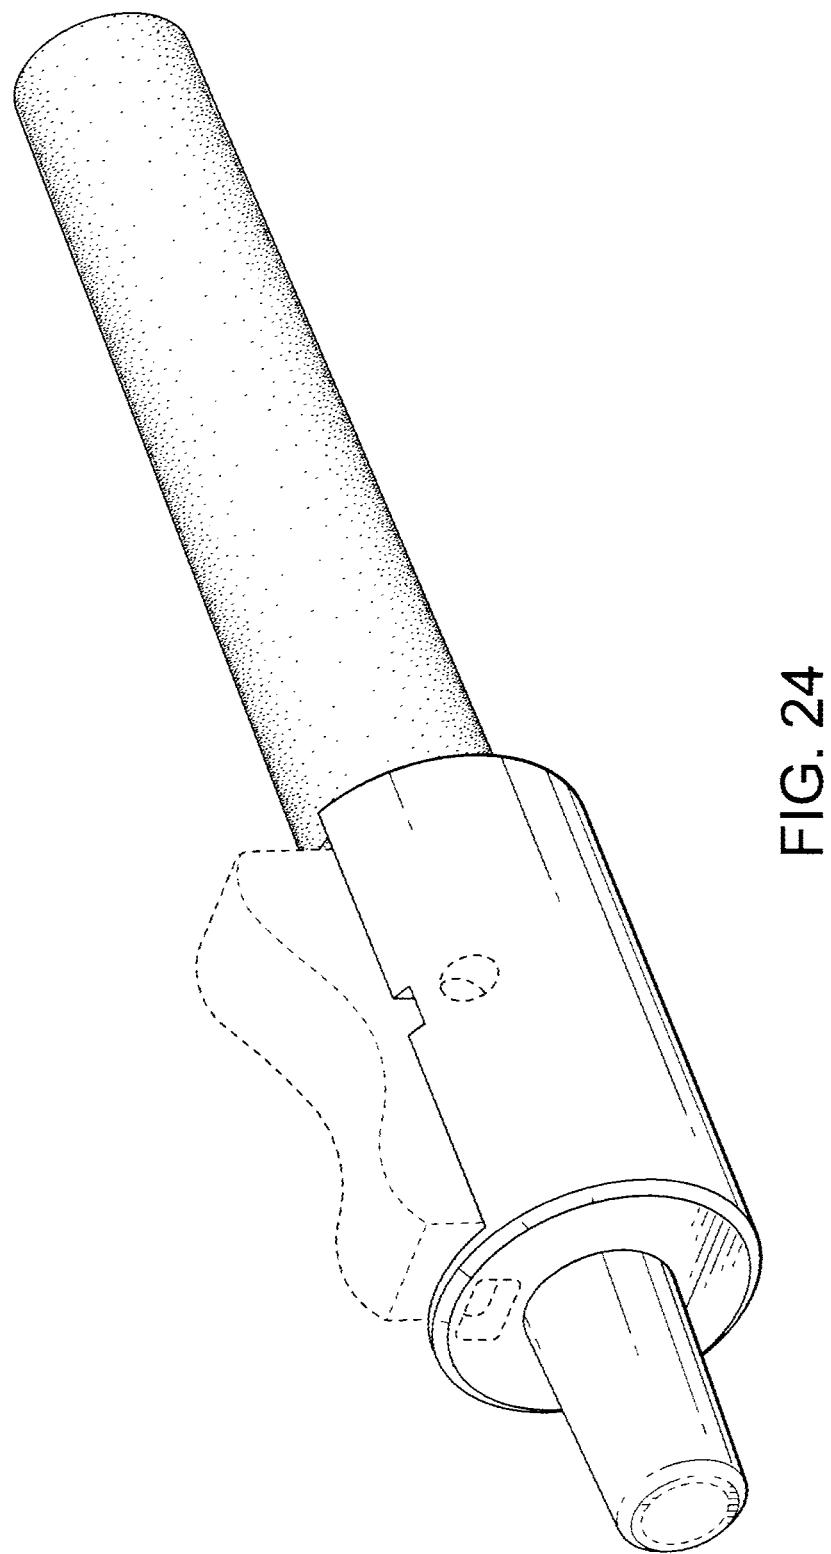


FIG. 24